

Standard executions		
Version	Symbol	Type
Double acting		RED
Double acting magnetic		REDM



		<b>II 2Gc IIC T5</b> <b>II 2Dc T100°C</b>
--	--	--

On request, they can be supplied according to 2014/34/EU - **ATEX**

Series of cylinders not conforming to standards  
The heads are connected with the body through thread; this guarantees perfect tightening.  
The cushionings are in nitrile rubber to relieve the impact of the piston.  
The standard cylinders are provided with rod nut.  
One or more magnetic reed switches can be applied to the magnetic type.  
For the magnetic reed switches type ASV see from page 1.110.1.  
For mounting accessories see from page 1.96.1.  
For rod accessories see from page 1.85.5.

Options	Suffix
Through rod	<b>P</b>
Seals FKM (for RED type only)      -20°C ÷ +150°C	<b>V</b>
Special versions on request	<b>/ S</b>

The options can be combined (when this is possible)

How to order: 40 / 50 REDMP


40	/	50	REDM	P
Bore	/	Stroke	Type	Option

Technical data	
Fluid	Compressed filtered air with or without lubrication. Lubrication, if started, must be continued.
Pressure	max 10 bar
Temperature range	-30°C ÷ +80°C (standard)      -20°C ÷ +150°C (V)
Materials	Heads: Anodised aluminium Tube: Anodised aluminium Rod: Chrome-plated steel C45 Seals: Polyurethane - NBR




Bore (mm)	Standard strokes (mm)	Max stroke (mm)
32	25, 50, 80,100, 125, 160, 200, 250, 320, 400, 500	1000
40		
50		

See page 1.1.3 to calculate the double acting cylinder force.  
Seal kits not available for these cylinders.

Type: RED-REDM

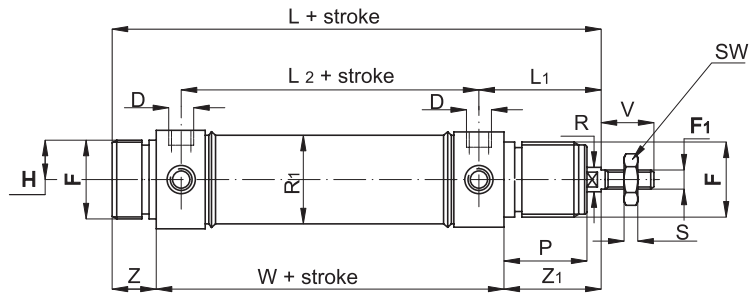

Ø mm	V	F	P	D	F <sub>1</sub>	R	L <sub>2</sub>	Z	Z <sub>1</sub>	W	L <sub>1</sub>	L	R <sub>1</sub>	H	S	SW
32	20	M 30x1,5	30	1/8"	M10x1,5	12	78	14	38	96	47	148	36	17,5	6	17
40	24	M 38x1,5	35	1/4"	M12x1,75	16	89	16	45	113	57	174	45	21	7	19
50	32	M 45x1,5	38	1/4"	M16x2	20	96	18	50	120	62	188	55	26,5	8	24

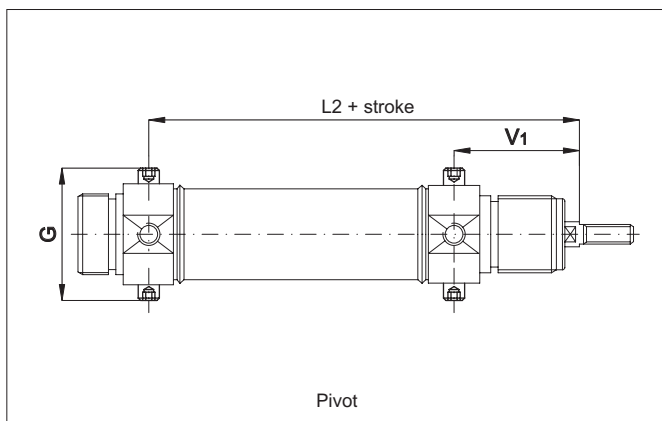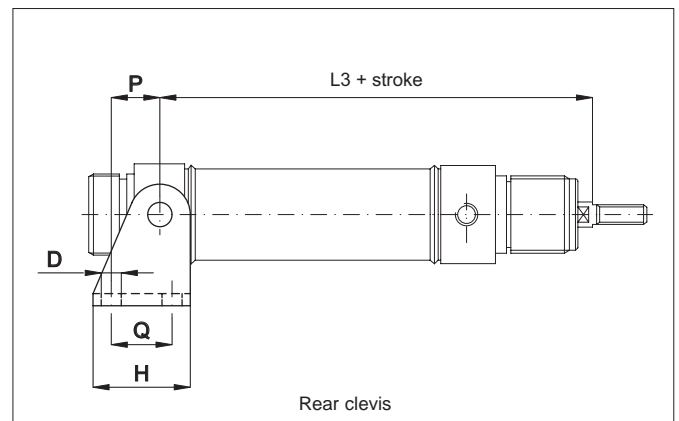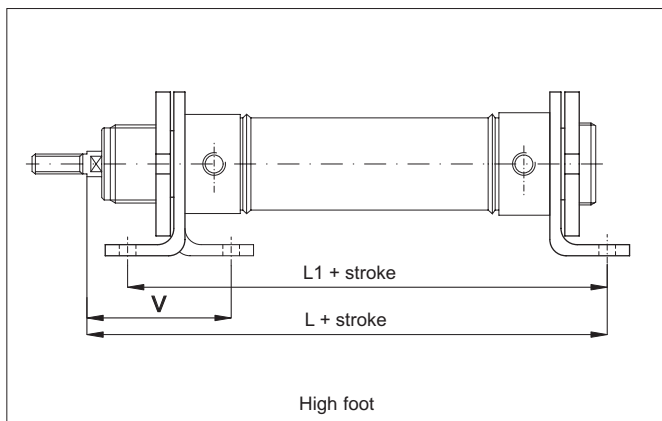

Ø mm	L	L <sub>1</sub>	L <sub>2</sub>	L <sub>3</sub>	V	V <sub>1</sub>	P	H	Q	G	D
32	148	124	125	125	48	47	20	40	24	51	7
40	178	153	146	146	60	57	27	50	30	61	9
50	190	160	158	158	64	62	30	54	34	75	9